



<b>Model Number:</b>	SD3-213T-4-BR-E-7.5
<b>MFG PN:</b>	1678
<b>List Price:</b>	

All data shown at HIGH voltage setting Format: STD 3 Phase

Electrical Data				General Data		
Rated Motor Output Power	7.5	HP		Frame Size	213T	
Rated Motor Speed	1750	r/min 60Hz		Enclosure	TEFC	
	1440	r/min 50Hz		Mounting	Rigid	
Rated Motor Voltage (3 Phase)	460	V/60Hz		NEMA Design	B	
	380	V/50Hz		IP Rating	55	
Rated Motor Current	9.5	A (In) @ 60Hz		Insulation Class	F	
	11.4	A (In) @ 50Hz		Tropicalization	1	
FL Current @ 208V	None	A (In) @ 60Hz		Duty	Cont.	
Service Factor	1.25	@ 60Hz		Cable Entry	None	
	1.25	@ 50Hz		Feet Removable	0	
KVA Code	H	60Hz		Double Drilled	0	
	E	50Hz		Frame Material	Cast	
Nominal Efficiency	91.7	% @ 60Hz		Shaft Material	None	
	90.0	% @ 50Hz		Coating	RAL	7024
Nominal Power Factor	0.81	cosθ @ 60Hz				
Full Load Torque Ft-Lb	S			Mechanical Data		
Load Data	Trq Ft-Lb	Trq %FL	Current Amps	Bearing DE Side	6308Z	
Locked Rotor				Bearing NDE Side	6308Z	
Breakdown	520.1133389	220.0	-	Comp Ring (wavey washer)	DE	
Pull Up	333.7535106	197.0	-	Weight	600.8625	Lbs
Load Data	RPM	Eff %	Current Amps	Moment of Inertia	None	kg.m3
125% of FL	1774.4	93.41	82.79	Site Conditions		
75% of FL	1785.5	94.29	52.63	Temp Rise @ Full Load °C	None	@ 60Hz
50% of FL	1790.5	93.78	40.19	Ambient Temperature °C	40	
No Load	1199.0	0	26.53	Altitude Above Sea Level (M)	1000	
Brake Torque (N-M)	100.0	<b>Loaded Torque Curves</b>		None		
Brake Coil Voltage	None	<b>P1 = Output Power (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor</b>				

<b>CT VFD Range</b>	
Haz Loc Rating	
Options:	
<b>UL File Number</b>	
<b>CSA File Number</b>	
<b>DOE File Number</b>	
<b>CE APPROVAL</b>	
<b>Wiring Diagram</b>	<b>NEMA-3-6-D</b>


Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540



<b>Model Number:</b>	SD3-213T-4-BR-E-7.5
<b>MFG PN:</b>	
<b>List Price:</b>	1678

Dimensional Drawing (For Reference Only)

841-213T7.5U4B

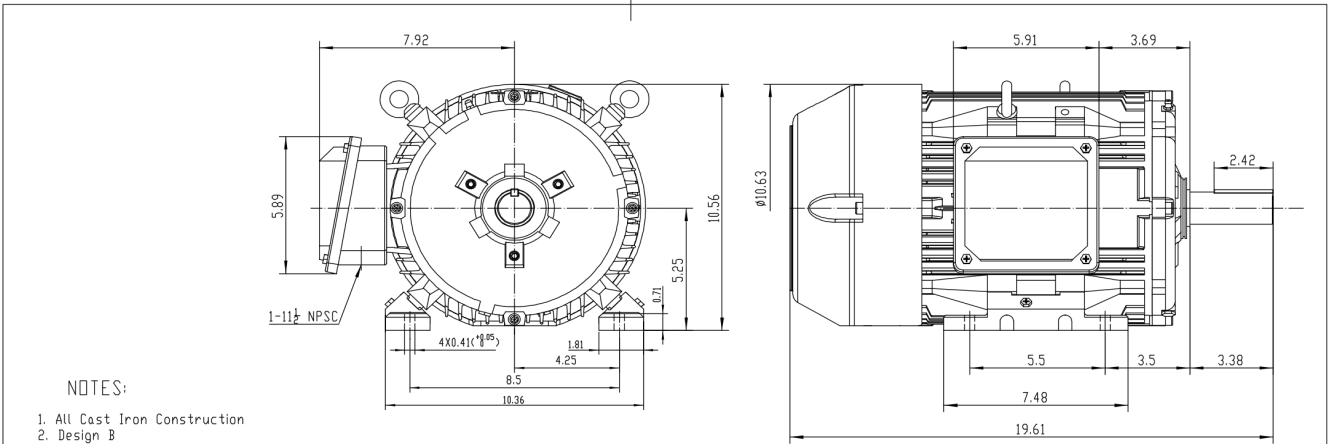


**NOTES:**

- All Cast Iron Construction
- Design B
- IP55 Labyrinth seals on DE and ODE
- H Class Insulation System
- Max Winding Temperature rise 80°C
- Max bearing temperature rise 45°C for 4 pole and 50°C for 2 pole motors when direct coupled.
- Regreasable bearings
- External Grounding provisions
- Maximum foot flatness deviation .127 mm
- Conductive Polymer Cooling Fan
- Diagonally Split Conduit Box rotatable in 90° Increments
- Lead seals in conduit box
- Maximum no load sound power 85 dBA(2 pole), Maximum no load sound power 70 dBA(4 pole), Maximum no load sound power 64 dBA(6 pole).
- No Load Motor Vibration not to exceed  
a. Radial 60HZ - 2.03mm/s (2,4 pole) and 1.52mm/s (6 pole)  
b. Axial 60HZ - 1.52mm/s
- 300 series Stainless Steel hardware
- Epoxy Coating meeting ASTM B117-97 for 96 h
- All internal surfaces coated with anti-corrosion coating.
- Internal Shaft Grounding brush installed on drive end.
- No Load test report included with motor

<b>TECHTOP IEEE 841 SEVERE DUTY ELECTRIC MOTOR</b>	
MODEL: SD3-213T-4-BR-E-7.5	TECHTOP.COM
NEMA 310	60 Hz 50 Hz
HP 7.5 7.5	MFG PN T 213T7.5U4B
RPM 1750 1440	SER # 1633162015
VOLTS(3Ø) 460 380	DATE 05/06/02
FLA 9.5 11.4	DESIGN B
SF 1.25 1	FRAME 213T
KVA CODE H E	ENCL TEFC
NOM EFF 0.917	DUTY Cont.
ARRESTOR	IP 55
BEARING SIZE DE 6308-2	INS CL H
DOE 3308-2	AMB 40
VFD 15:1 CT-1.0 SF	WEIGHT 168.5 (lbs)
	MADE IN CHINA

**CONNECTIONS**

T1 T2 T3



<b>TECHTOP</b>		NEMA TEFC 213T-7.5HP-4P	
ShangHai HIMAK Electrical Machinery CO., LTD		IEEE-841 UNITS:INCH	
Design	Standard	NO:	CY254.A20.002
Checker	Allow	STEP MARK	1:3.5 SORT Cast iron Motor
Auditing	Date		

Components			
Item	Model	Description	List Price
C-Face Kit			
D-Flange Kit			
DE Endplate Kit			
NDE Endplate Kit			
Junction Box			
Cooling Fan Cover			
Cooling Fan			
Replacement Feet			
DE Bearing Retainer Kit			
NDE Bearing Retainer Kit			

